


Bulkhead Fittings

PRESSURE CONNECTIONS CORP.

2701 Bulkhead Union Elbow



SAE 070701

Ref. Aeroquip 2043 (-1)
Ref. Parker WETX / 2353
Ref. Weatherhead 5525

2701-①-② ①-MJ ②-BH	Tube O.D.	① Male JIC	② Bulkhead Male JIC	D Drill	I Assm.	K Thick	M Length	M1 Length	Ø W Diameter	Y Flats	Operating Pressure
2701-03-03-4	3/16	3/8 - 24	3/8 - 24	0.125	0.92	0.094	0.97	1.50	0.38	7/16	7500
2701-04-04-4	1/4	7/16 - 20	7/16 - 20	0.172	1.02	0.094	0.97	1.59	0.44	7/16	7,500
2701-05-05-4	5/16	1/2 - 20	1/2 - 20	0.234	1.02	0.094	1.06	1.72	0.50	9/16	6,000
2701-06-06-4	3/8	9/16 - 18	9/16 - 18	0.297	1.09	0.094	1.09	1.81	0.56	9/16	6,000
2701-08-08-4	1/2	3/4 - 16	3/4 - 16	0.391	1.25	0.125	1.36	2.11	0.75	3/4	6,000
2701-10-10-4	5/8	7/8 - 14	7/8 - 14	0.484	1.39	0.125	1.56	2.39	0.88	7/8	5,000
2701-12-12-4	3/4	1 1/16 - 12	1 1/16 - 12	0.609	1.56	0.125	1.78	2.67	1.06	1 1/16	4,000
2701-16-16-4	1"	1 5/16 - 12	1 5/16 - 12	0.844	1.56	0.125	1.94	2.80	1.31	1 5/16	4,000
2701-20-20-4	1 1/4	1 5/8 - 12	1 5/8 - 12	1.078	1.61	0.125	2.17	3.12	1.63	1 5/8	4,000
2701-24-24	1 1/2	1 7/8 - 12	1 7/8 - 12	1.312	1.62	0.125	2.34	3.42	1.88	2"	3,000


4:1 Safety Factor

37° JIC Bulkhead information is on page 90.

Bulkhead Locknut (306) is on page 91.

37° JIC
Bulkhead

2702 Bulkhead Union Elbow

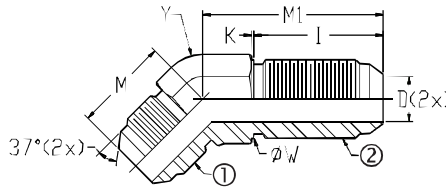

SAE 070801

Ref. Aeroquip 2042 (-1)
Ref. Parker WNTX / 3353
Ref. Weatherhead 5375

2702-①-② ①-MJ ②-BH	Tube O.D.	① Male JIC	② Bulkhead Male JIC	D Drill	I Assm.	K Thick	M Length	M1 Length	Ø W Diameter	Y Flats	Operating Pressure
2702-03-03-4	3/16	3/8 - 24	3/8 - 24	0.125	1.01	0.094	0.69	1.36	0.38	7/16	7,500
2702-04-04-4	1/4	7/16 - 20	7/16 - 20	0.172	1.02	0.094	0.77	1.53	0.44	7/16	7,500
2702-05-05-4	5/16	1/2 - 20	1/2 - 20	0.234	1.02	0.094	0.77	1.66	0.50	9/16	7,500
2702-06-06-4	3/8	9/16 - 18	9/16 - 18	0.297	1.09	0.094	0.83	1.67	0.56	9/16	7,500
2702-08-08-4	1/2	3/4 - 16	3/4 - 16	0.391	1.25	0.125	0.98	1.94	0.75	3/4	6,000
2702-10-10-4	5/8	7/8 - 14	7/8 - 14	0.484	1.39	0.125	1.11	2.17	0.88	7/8	6,000
2702-12-12-4	3/4	1 1/16 - 12	1 1/16 - 12	0.609	1.56	0.125	1.28	2.44	1.06	1 1/16	5,000
2702-16-16-4	1"	1 5/16 - 12	1 5/16 - 12	0.844	1.56	0.125	1.47	2.56	1.31	1 5/16	4,000
2702-20-20-4	1 1/4	1 5/8 - 12	1 5/8 - 12	1.078	1.61	0.125	1.59	2.65	1.63	1 5/8	4,000

4:1 Safety Factor