


# O-Ring Face Seal

**PRESSURE CONNECTIONS CORP.**

## FS-2406 OFS Tube Reducer

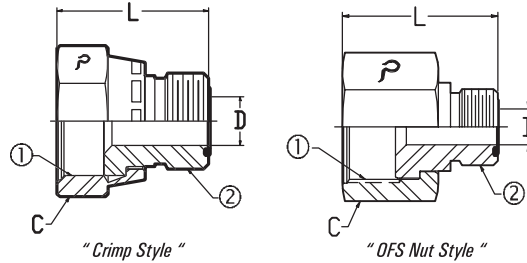


**SAE 520123**

Ref. Aeroquip FF2281T  
Ref. Parker TRLO  
Ref. Weatherhead 4015

FS-2406-①-② ①-FOFX ②-OFS	Tube O.D.	① Female OFS Swivel	② Male OFS	C Nut Hex	D Drill	L Length	Operating Pressure
FS-2406-06-04 <i>Crimp Style</i>	3/8 x 1/4	11/16 - 16	9/16 - 18	13/16	0.172	1.15	9,200
FS-2406-06-06 <i>Crimp Style</i>	3/8	11/16 - 16	11/16 - 16	13/16	0.264	1.20	9,200
FS-2406-08-04	1/2 x 1/4	13/16 - 16	9/16 - 18	15/16	0.172	1.29	9,200
FS-2406-08-06 <i>Crimp Style</i>	1/2 x 3/8	13/16 - 16	11/16 - 16	15/16	0.264	1.31	9,200
FS-2406-10-06	5/8 x 3/8	1 - 14	11/16 - 16	1 1/8	0.264	1.49	6,000
FS-2406-10-08	5/8 x 1/2	1 - 14	13/16 - 16	1 1/8	0.378	1.53	6,000
FS-2406-12-06	3/4 x 3/8	1 3/16 - 12	11/16 - 16	1 3/8	0.264	1.57	6,000
FS-2406-12-08	3/4 x 1/2	1 3/16 - 12	13/16 - 16	1 3/8	0.378	1.66	6,000
FS-2406-12-10 <i>Crimp Style</i>	3/4 x 5/8	1 3/16 - 12	1 - 14	1 3/8	0.486	1.73	6,000
FS-2406-16-08	1" x 1/2	1 7/16 - 12	13/16 - 16	1 5/8	0.378	1.73	6,000
FS-2406-16-10	1" x 5/8	1 7/16 - 12	1 - 14	1 5/8	0.484	1.80	6,000
FS-2406-16-12 <i>Crimp Style</i>	1" x 3/4	1 7/16 - 12	1 3/16 - 12	1 5/8	0.609	1.88	6,000
FS-2406-20-16 <i>Crimp Style</i>	1 1/4 x 1"	1 11/16 - 12	1 7/16 - 12	1 7/8	0.811	2.03	5,000
FS-2406-20-24 <i>Crimp Style</i>	1 1/4 x 1 1/2	1 11/16 - 12	2 - 12	1 7/8	1.024	2.47	5,000
FS-2406-24-20	1 1/2 x 1 1/4	2 - 12	1 11/16 - 12	2 1/4	1.024	1.91	5,000

4:1 Safety Factor

## FS-2408 OFS Plug



**SAE 520109**

Ref. Aeroquip FF9767  
Ref. Parker PNLO  
Ref. Weatherhead 4229

FS-2408-① ①-OFS	Tube O.D.	① Male OFS	C Hex	D Drill	L Length	Operating Pressure
FS-2408-04	1/4	9/16 - 18	5/8	0.172	0.66	9,200
FS-2408-06	3/8	11/16 - 16	3/4	0.264	0.75	9,200
FS-2408-08	1/2	13/16 - 16	7/8	0.378	0.88	9,200
FS-2408-10	5/8	1 - 14	1 1/16	0.484	1.02	6,000
FS-2408-12	3/4	1 3/16 - 12	1 1/4	0.609	1.08	6,000
FS-2408-16	1"	1 7/16 - 12	1 1/2	0.811	1.10	6,000
FS-2408-20	1 1/4	1 11/16 - 12	1 3/4	1.024	1.10	6,000
FS-2408-24	1 1/2	2 - 12	2 1/8	1.260	1.10	6,000

4:1 Safety Factor

O-Ring  
Face Seal