


SAE J514

GP-6504

**Male JIC x Female JIC Swivel
Pipe Port**

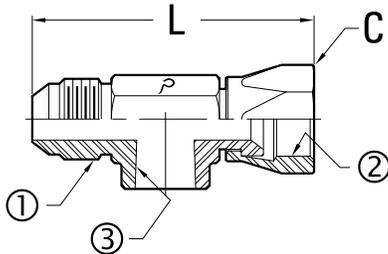

GP-6504-①-②-③P ①-MJ ②-FJX ③-Pipe Port	Tube O.D.	① Male JIC	② Female JIC Swivel	③ NPTF Port	C Nut Hex	L Length	Operating Pressure
GP-6504-04-04-2P	1/4	7/16 - 20	7/16 - 20	1/8 - 27	9/16	2.28	6,000
GP-6504-04-04-4P	1/4	7/16 - 20	7/16 - 20	1/4 - 18	9/16	2.28	6,000
GP-6504-04-04-6P	1/4	7/16 - 20	7/16 - 20	3/8 - 18	9/16	2.28	6,000
GP-6504-06-06-2P	3/8	9/16 - 18	9/16 - 18	1/8 - 27	11/16	2.40	6,000
GP-6504-06-06-4P	3/8	9/16 - 18	9/16 - 18	1/4 - 18	11/16	2.40	6,000
GP-6504-06-06-6P	3/8	9/16 - 18	9/16 - 18	3/8 - 18	11/16	2.40	6,000
GP-6504-08-08-2P	1/2	3/4 - 16	3/4 - 16	1/8 - 27	7/8	2.62	6,000
GP-6504-08-08-4P	1/2	3/4 - 16	3/4 - 16	1/4 - 18	7/8	2.62	6,000
GP-6504-08-08-6P	1/2	3/4 - 16	3/4 - 16	3/8 - 18	7/8	2.75	6,000
GP-6504-10-10-2P	5/8	7/8 - 14	7/8 - 14	1/8 - 27	1"	2.96	5,000
GP-6504-10-10-4P	5/8	7/8 - 14	7/8 - 14	1/4 - 18	1"	2.96	5,000
GP-6504-10-10-6P	5/8	7/8 - 14	7/8 - 14	3/8 - 18	1"	2.96	5,000
GP-6504-12-12-2P	3/4	1 1/16 - 12	1 1/16 - 12	1/8 - 27	1 1/4	3.45	5,000
GP-6504-12-12-4P	3/4	1 1/16 - 12	1 1/16 - 12	1/4 - 18	1 1/4	3.45	5,000
GP-6504-12-12-6P	3/4	1 1/16 - 12	1 1/16 - 12	3/8 - 18	1 1/4	3.45	5,000
GP-6504-16-16-2P	1"	1 5/16 - 12	1 5/16 - 12	1/8 - 27	1 1/2	4.05	4,000
GP-6504-16-16-4P	1"	1 5/16 - 12	1 5/16 - 12	1/4 - 18	1 1/2	4.05	4,000
GP-6504-16-16-6P	1"	1 5/16 - 12	1 5/16 - 12	3/8 - 18	1 1/2	4.05	4,000
GP-6504-20-20-2P	1 1/4	1 5/8 - 12	1 5/8 - 12	1/8 - 27	1 5/8	4.27	4,000
GP-6504-20-20-4P	1 1/4	1 5/8 - 12	1 5/8 - 12	1/4 - 18	1 5/8	4.27	4,000
GP-6504-20-20-6P	1 1/4	1 5/8 - 12	1 5/8 - 12	3/8 - 18	1 5/8	4.27	4,000

4:1 Safety Factor

Please Note

For a full 360° horizontal adjustment, insert series GP-6405 (p.15) into an O-ring port.