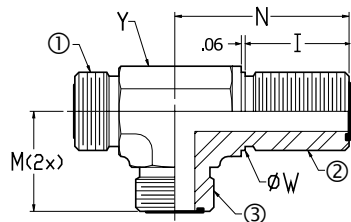


SAE 520958

Ref. Parker WJJLO
 Ref. Weatherhead 4726

**FS-2704**

OFS Bulkhead Run Tee
OFS x Bulkhead Male OFS x OFS

FS-2704-①-②-②-4 ①-OFS ②-BH OFS ③-OFS	Tube O.D.	① ③ Male OFS	② Bulkhead Male OFS	I Assm.	M Length	N Length	Ø W Diameter	Y Flats	Operating Pressure
FS-2704-04-04-04-4	1/4	9/16 - 18	9/16 - 18	1.24	0.89	1.85	0.563	9/16	9,200
FS-2704-06-06-06-4	3/8	11/16 - 16	11/16 - 16	1.34	1.02	2.05	0.688	3/4	9,200
FS-2704-08-08-08-4	1/2	13/16 - 16	13/16 - 16	1.38	1.14	2.18	0.813	3/4	9,200
FS-2704-10-10-10-4	5/8	1 - 14	1 - 14	1.60	1.36	2.48	1.000	1 1/16	6,000
FS-2704-12-12-12-4	3/4	1 3/16 - 12	1 3/16 - 12	1.64	1.52	2.65	1.188	1 3/16	6,000
FS-2704-16-16-16-4	1"	1 7/16 - 12	1 7/16 - 12	1.66	1.67	2.80	1.438	1 7/16	6,000
FS-2704-24-24-24-4	1 1/2	2 - 12	2 - 12	1.66	1.95	3.13	2.000	1 7/8	4,000

4:1 Safety Factor

Your Quality Connection

Page 191

Face Seal