


SAE J514

Ref. Aeroquip 2242
 Ref. Parker G6X
 Ref. Weatherhead C5256

6506

Swivel Nut Adapter
 Female Pipe x Female JIC Swivel



6506-①-② ①-FP ②-FJX	Tube O.D.	① Female NPTF	② Female JIC Swivel	C Body Hex	C1 Nut Hex	D Drill	L Length	Operating Pressure
6506-02-04	1/4	1/8 - 27	7/16 - 20	9/16	9/16	0.172	1.27	6,000
6506-04-04	1/4	1/4 - 18	7/16 - 20	3/4	9/16	0.172	1.49	6,000
6506-04-06	3/8	1/4 - 18	9/16 - 18	3/4	11/16	0.297	1.58	5,000
6506-06-06	3/8	3/8 - 18	9/16 - 18	7/8	11/16	0.297	1.67	5,000
6506-06-08	1/2	3/8 - 18	3/4 - 16	7/8	7/8	0.391	1.74	5,000
6506-06-10	5/8	3/8 - 18	7/8 - 14	7/8	1"	0.484	1.90	5,000
6506-08-06	3/8	1/2 - 14	9/16 - 18	1 1/8	11/16	0.297	1.95	5,000
6506-08-08	1/2	1/2 - 14	3/4 - 16	1"	7/8	0.391	1.91	5,000
6506-08-10	5/8	1/2 - 14	7/8 - 14	1"	1"	0.484	2.04	5,000
6506-12-10	5/8	3/4 - 14	7/8 - 14	1 3/8	1"	0.484	2.11	4,000
6506-12-12	3/4	3/4 - 14	1 1/16 - 12	1 3/8	1 1/4	0.609	2.08	4,000
6506-16-16	1"	1 - 11 1/2	1 5/16 - 12	1 5/8	1 1/2	0.844	2.58	3,000
6506-20-20	1 1/4	1 1/4 - 11 1/2	1 5/8 - 12	2"	2"	1.078	2.84	2,500
6506-24-24	1 1/2	1 1/2 - 11 1/2	1 7/8 - 12	2 3/8	2 1/4	1.312	2.92	2,000


4:1 Safety Factor

SAE J514

Ref. Parker H6X

6565

Swivel Nut Union
 Female JIC Swivel x Female JIC Swivel

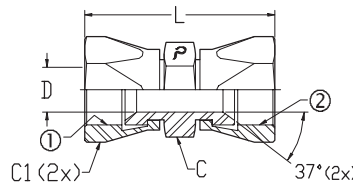

6565-①-② ①-FJX ②-FJX	Tube O.D.	① Female JIC Swivel	② Female JIC Swivel	C Body Hex	C1 Nut Hex	D Drill	L Length	Operating Pressure
6565-04-04	1/4	7/16 - 20	7/16 - 20	1/2	9/16	0.172	1.60	7,500
6565-06-06	3/8	9/16 - 18	9/16 - 18	5/8	11/16	0.297	1.84	5,000
6565-08-08	1/2	3/4 - 16	3/4 - 16	13/16	7/8	0.391	2.07	5,000
6565-10-10	5/8	7/8 - 14	7/8 - 14	1"	1"	0.484	2.46	5,000
6565-12-12	3/4	1 1/16 - 12	1 1/16 - 12	1 1/8	1 1/4	0.609	2.61	5,000
6565-16-16	1"	1 5/16 - 12	1 5/16 - 12	1 1/2	1 1/2	0.844	2.74	3,600

4:1 Safety Factor

Female JIC Swivels