


2503

37° JIC Flare Fittings Male Elbow

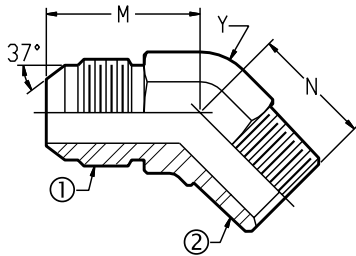

Reference
Aeroquip 2023
Parker Hose 3103
Parker Tube VTX
Weatherhead C5355
SAE 070302

Part No.	Tube O.D.	1 Male JIC	2 Male NPTF	M Length	N Length	Y Flats	Operating Pressure
2503-02-02-4 #	1/8	5/16 - 24	1/8 - 27	0.69	0.52	7/16	6,000
2503-03-02-4	3/16	3/8 - 24	1/8 - 27	0.69	0.52	7/16	6,000
2503-04-02-4	1/4	7/16 - 20	1/8 - 27	0.72	0.64	7/16	6,000
2503-04-04-4	1/4	7/16 - 20	1/4 - 18	0.82	0.86	9/16	6,000
2503-04-06-4	1/4	7/16 - 20	3/8 - 18	0.85	0.95	3/4	6,000
2503-04-08-4 #	1/4	7/16 - 20	1/2 - 14	0.87	1.17	7/8	6,000
2503-05-02-4	5/16	1/2 - 20	1/8 - 27	0.77	0.64	9/16	6,000
2503-05-04-4	5/16	1/2 - 20	1/4 - 18	0.82	0.86	9/16	6,000
2503-06-02-4	3/8	9/16 - 18	1/8 - 27	0.83	0.67	9/16	6,000
2503-06-04-4	3/8	9/16 - 18	1/4 - 18	0.83	0.86	9/16	6,000
2503-06-06-4	3/8	9/16 - 18	3/8 - 18	0.87	0.95	3/4	6,000
2503-06-08-4	3/8	9/16 - 18	1/2 - 14	0.88	1.17	7/8	6,000
2503-08-04-4	1/2	3/4 - 16	1/4 - 18	0.98	0.95	3/4	6,000
2503-08-06-4	1/2	3/4 - 16	3/8 - 18	0.98	0.95	3/4	6,000
2503-08-08-4	1/2	3/4 - 16	1/2 - 14	0.99	1.17	7/8	6,000
2503-08-12-4	1/2	3/4 - 16	3/4 - 14	1.04	1.20	1 1/16	4,000
2503-10-04-4 #	5/8	7/8 - 14	1/4 - 18	1.11	0.94	7/8	5,000
2503-10-06-4	5/8	7/8 - 14	3/8 - 18	1.11	0.98	7/8	5,000
2503-10-08-4	5/8	7/8 - 14	1/2 - 14	1.11	1.17	7/8	5,000
2503-10-12-4	5/8	7/8 - 14	3/4 - 14	1.16	1.20	1 1/16	4,000
2503-12-08-4	3/4	1 1/16 - 12	1/2 - 14	1.28	1.20	1 1/16	4,000
2503-12-12-4	3/4	1 1/16 - 12	3/4 - 14	1.28	1.20	1 1/16	4,000
2503-12-16-4	3/4	1 1/16 - 12	1 - 11 1/2	1.42	1.48	1 5/16	3,000
2503-14-12-4 #	7/8	1 3/16 - 12	3/4 - 14	1.39	1.27	1 5/16	4,000
2503-16-08-4 #	1"	1 5/16 - 12	1/2 - 14	1.47	1.29	1 5/16	4,000
2503-16-12-4	1"	1 5/16 - 12	3/4 - 14	1.47	1.26	1 5/16	4,000
2503-16-16-4	1"	1 5/16 - 12	1 - 11 1/2	1.47	1.48	1 5/16	3,000
2503-16-20-4	1"	1 5/16 - 12	1 1/4 - 11 1/2	1.54	1.67	1 5/8	2,500
2503-20-16-4	1 1/4	1 5/8 - 12	1 - 11 1/2	1.59	1.62	1 5/8	3,000
2503-20-20-4	1 1/4	1 5/8 - 12	1 1/4 - 11 1/2	1.59	1.67	1 5/8	2,500
2503-24-20-4 #	1 1/2	1 7/8 - 12	1 1/4 - 11 1/2	1.78	1.74	1 7/8	2,500
2503-24-24-4	1 1/2	1 7/8 - 12	1 1/2 - 11 1/2	1.78	1.77	1 7/8	2,500
2503-32-32-4	2"	2 1/2 - 12	2 - 11 1/2	2.22	2.11	2 1/2	2,000

• Available in 316 Stainless Steel

4:1 Safety Factor

Minimum Order Quantity May Apply.